




ADE-23



ADE-5

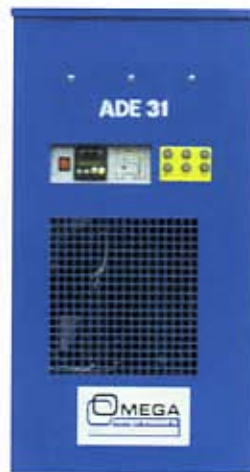

ADE-31

- High air Temperature inlet 93°C (200°F)
- Built-in independent air-cooled aftercooler
- R134A environment friendly refrigerant
- Fully hermetically sealed refrigerant compressor includes thermal overload protection and anti-vibration
- Independent thermally protected cooling fans for the aftercooler and the condenser
- High efficiency moisture separator for evaporator
- High efficiency prefilter/moisture separator for the aftercooler
- Robust heavy gauge steel construction
- Easily removable access panels
- Neat and easily serviceable layout of components
- Powder paint coated finish
- Automatic electronic drains
- Electronic controls complete with LED readout is standard on all models
- Suitable for high inlet air temperature or high ambient air temperature
- All dryers are factory tested prior to shipment

## Specifications

MODEL	SCFM	VOLTAGE/		CONNECTIONS	DIMENSIONS (INCHES)			WEIGHT LBS.
		PHASE	PHASE		HEIGHT	WIDTH	DEPTH	
ADE-5	20	115V/1PH	3/4" NPT	19.9	17.7	21.3	88	
ADE-8	30	115V/1PH	3/4" NPT	19.9	17.7	21.3	90	
ADE-11	39	115V/1PH	3/4" NPT	31.5	17.7	23.2	105	
ADE-18	64	115V/1PH	3/4" NPT	31.5	17.7	23.2	110	
ADE-23	81	115V/1PH	1" NPT	31.5	17.7	23.2	115	
ADE-31	109	230V/1PH	1" NPT	40	21.3	26.4	152	
ADE-43	152	230V/1PH	1-1/4" NPT	45.7	23.2	32.3	198	
ADE-52	184	230V/1PH	1-1/2" NPT	45.7	23.2	32.3	258	
ADE-61	215	230V/1PH	2" NPT	45.7	23.2	32.3	280	
ADE-75	265	230V/1PH	2" NPT	45.7	23.2	32.3	285	

Maximum inlet temperature: 93°C (200°F) Maximum inlet pressure: 175 psig.