

“T” HANDLE DRILLS


T-Handle Drills

Performance:

Power: 0.80 hp (0.60 kw) - 1.0 hp (0.75 kw)
 Speed Range: 300 rpm - 2650 rpm
 Chuck Capacity: 3/8" (10 mm) - 1/2" (13 mm)

Features:

Reversible & Non-reversible
 Lever Start
 Handle Grips

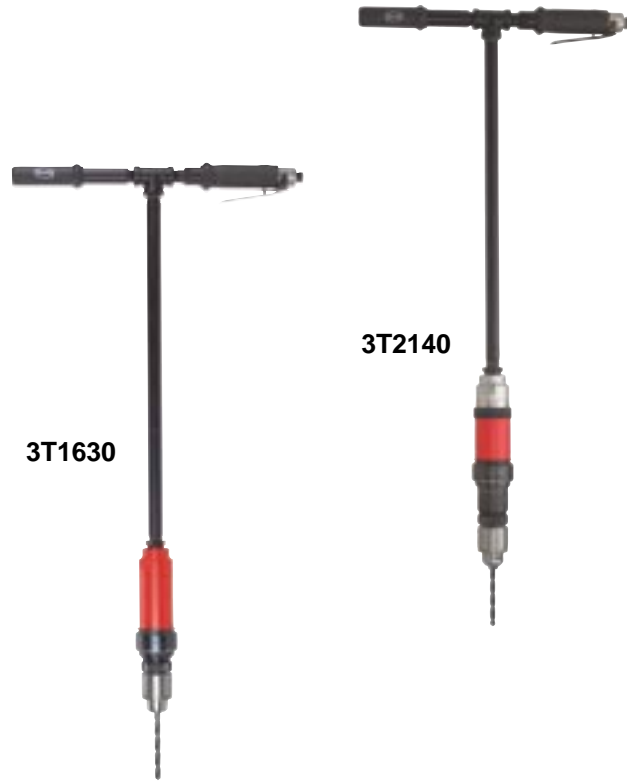

Model Number	Chuck Capacity		Free Speed rpm	Weight		Length		Side To Center		Air Consumption		Sound Level dB(A)	Spindle Thread
	in.	mm		lb	kg	in.	mm	in.	mm	cfm	l/s		
"T" Handle - 1.0 hp (0.75 kw) - Non-reversible													
▶ 3T1630	3/8	10	2650	6.9	3.1	30	762	1.0	25	35	17	80	1/2"-20
3T1530	3/8	10	2150	6.9	3.1	30	762	1.0	25	35	17	80	1/2"-20
3T1430	3/8	10	1400	6.2	2.8	30	762	1.0	25	35	17	80	1/2"-20
3T1640	1/2	13	2650	7.0	3.2	30	762	1.0	25	35	17	80	1/2"-20
3T1440	1/2	13	1400	6.3	2.9	30	762	1.0	25	35	17	80	1/2"-20
3T1240	1/2	13	650	6.3	2.9	30	762	1.0	25	35	17	80	1/2"-20
3T1140	1/2	13	360	6.3	2.9	30	762	1.0	25	35	17	80	1/2"-20
"T" Handle - 0.80 hp (0.60 kw) - Reversible													
3T2630	3/8	10	2250	7.2	3.3	30	762	1.0	25	33	16	81	1/2"-20
3T2140	1/2	13	300	7.2	3.3	30	762	1.0	25	33	16	81	1/2"-20

General:

Air Inlet Size: 1/4" NPT
 Recommended Hose Size: 3/8" (10 mm)
 Performance rated @ 90 psig (6.2 bar) air pressure
 Tools available with BSPT air inlet upon request

Standard Equipment:

3-jaw Chuck & Key
 Parts list, Safety and Instruction manual
 Comfort Grip

Accessories:

Drill Accessories, see pages 24-28

▶ The quick ship icon indicates our most popular models, selected for their "off-the-shelf" availability from a Sioux Authorized Distributor or distribution warehouse. See page 9 for more information on Quick Ship.



SAFETY Precaution: Read and follow all safety and operating instructions.
WARNING: Face & eye protection must be worn while operating power tools, per ANSI B186.1

