

POLISHER


FINISHING ACCESSORIES



**Orbital Sander Backing Pads**

Sioux random orbital backing pads are medium density, urethane pads rated for speeds up to 13,000 rpm. The 5" pads are a 3/8" thick with low profile design, while the 6" pads are 5/8" thick with tapered profile for fine feathering in corners or around edges.

Part Number	Diameter		Backing	Profile	Style
	In.	mm			
593	5	125	PSA1	Low	Non-Vac
593V	5	125	PSA1	Low	Vacuum
593J	5	125	H&L2	Low	Non-Vac
593JV	5	125	H&L2	Low	Vacuum
594	6	150	PSA1	Tapered	Non-Vac
594V	6	150	PSA1	Tapered	Vacuum
594J	6	150	H&L2	Tapered	Non-Vac
594JV	6	150	H&L2	Tapered	Vacuum

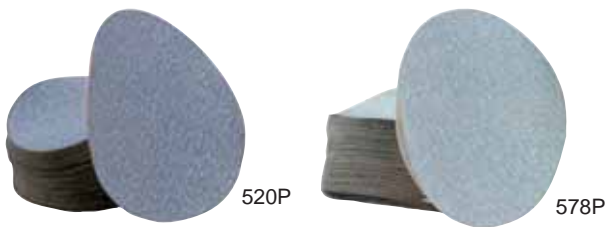

**Pressure Sensitive Adhesive Discs**

For use with PSA Backing Pads  
Packaged in cartons of 100

Part Number	Diameter		Grit	Features
	In.	mm		
519P	5	125	240	
520P	5	125	180	
521P	5	125	100	
519PV	5	125	240	Vacuum pickup holes
578P	6	150	180	
579P	6	150	100	
577PV	6	150	240	Vacuum pickup holes
578PV	6	150	180	Vacuum pickup holes
579PV	6	150	100	Vacuum pickup holes



**Speed-Lok Backing Pads**

For use on tools with 1/4" collets

Part Number	Diameter		Shank Size
	In.	mm	
587M	2	50	1/4"
588M	3	75	1/4"



**Speed-Lok Abrasive Discs**

For use on Speed-Lok Backing Pads (Above)

Part Number	Diameter		Grit
	In.	mm	
587-60	2	50	60
587-120	2	50	120
587-240	2	50	240
588-60	3	75	60
588-120	3	75	120
588-240	3	75	240



**SAFETY PRECAUTION:** Read and follow all safety and operating instructions.  
**WARNING:** Face & eye protection must be worn while operating power tools, per ANSI B186.1