

RIGHT ANGLE SCREWDRIVERS

Performance:

Torque: 20 in. lb (2.3 Nm) - 310 in. lb (35 Nm)

Speed: 400 rpm - 2500 rpm


Features:

Stall Drive and Adjustable Clutch

Button Reverse

Lever Start

Rear Exhaust

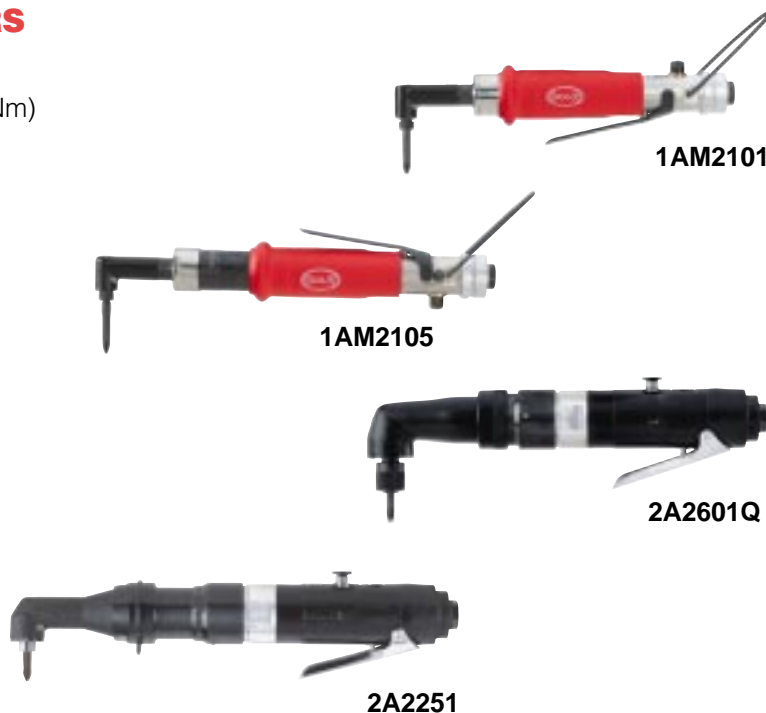

| Model Number | | Maximum Torque (Soft Joint) | | Free Speed | Weight | | Length | | Side To Center | | Sound Level |
|---------------------------------------|-------------------|-----------------------------|------|------------|--------|-----|--------|-----|----------------|----|-------------|
| 1/4" Quick Change | 1/4" Internal Hex | in. lb | Nm | rpm | lb | kg | in. | mm | in. | mm | dB(A) |
| Stall Drive | | | | | | | | | | | |
| | 1AM2401 | 20 | 2.3 | 2200 | 1.4 | 0.6 | 9.1 | 231 | 0.3 | 8 | 75 |
| | 1AM2301 | 25 | 2.8 | 1500 | 1.5 | 0.7 | 10.0 | 254 | 0.3 | 8 | 75 |
| | 1AM2201 | 35 | 4.0 | 1100 | 1.5 | 0.7 | 10.0 | 254 | 0.3 | 8 | 75 |
| | 1AM2101 | 50 | 5.7 | 800 | 1.5 | 0.7 | 10.0 | 254 | 0.3 | 8 | 75 |
| 2A2301Q | | 65 | 7.3 | 2500 | 3.4 | 1.5 | 11.5 | 292 | 0.7 | 18 | 84 |
| 2A2601Q | 2A2601 | 75 | 8.5 | 2000 | 3.4 | 1.5 | 11.5 | 292 | 0.7 | 18 | 84 |
| 2A2201Q | 2A2201 | 115 | 13.0 | 1200 | 3.8 | 1.7 | 12.8 | 325 | 0.7 | 18 | 84 |
| 2A2101Q | 2A2101 | 240 | 27.1 | 700 | 3.8 | 1.7 | 12.8 | 325 | 0.7 | 18 | 84 |
| Stall Drive - Low Profile Head | | | | | | | | | | | |
| | 2A2351 | 65 | 7.3 | 2500 | 3.3 | 1.5 | 11.5 | 292 | 0.5 | 13 | 84 |
| | 2A2651 | 75 | 8.5 | 2000 | 3.3 | 1.5 | 11.5 | 292 | 0.5 | 13 | 84 |
| | 2A2251 | 115 | 13.0 | 1200 | 3.6 | 1.6 | 12.8 | 325 | 0.5 | 13 | 84 |
| | 2A2151 | 240 | 27.1 | 700 | 3.6 | 1.6 | 12.8 | 325 | 0.5 | 13 | 84 |
| | 2A2551 | 310 | 35.0 | 400 | 3.6 | 1.6 | 12.8 | 325 | 0.5 | 13 | 84 |
| Adjustable Clutch | | | | | | | | | | | |
| | 1AM2405 | 20 | 2.3 | 2200 | 1.7 | 0.8 | 10.6 | 269 | 0.3 | 8 | 75 |
| | 1AM2305 | 25 | 2.8 | 1500 | 1.9 | 0.9 | 11.8 | 300 | 0.3 | 8 | 75 |
| | 1AM2205 | 35 | 4.0 | 1100 | 1.9 | 0.9 | 11.8 | 300 | 0.3 | 8 | 75 |
| | 1AM2105 | 50 | 5.7 | 800 | 1.9 | 0.9 | 11.8 | 300 | 0.3 | 8 | 75 |
| | 2A2205 | 120 | 13.6 | 700 | 4.5 | 2.0 | 13.8 | 351 | 0.7 | 18 | 84 |

General:

Air Inlet Size: 1/4" NPT

Recommended Hose Size: 1/4" (6 mm) (1AM series); 3/8" (10 mm) (2A series)

Performance rated @ 90 psig (6.2 bar) air pressure

Tools available with BSPT air inlet upon request

Standard Equipment:

Parts list, Safety and Instruction manual

Comfort Grip (1AM series)

Accessories:

Screwdriver Accessories, see page 48

Screwdriver Bits and Finders, see pages 59-60



SAFETY Precaution: Read and follow all safety and operating instructions.
WARNING: Face & eye protection must be worn while operating power tools, per ANSI B186.1



DRILLS

ASSEMBLY

ABRASIVE

FINISHING

PERCUSSIVE

SPECIALTY

ACCESSORIES