

STALL INLINE AND Z-HANDLE SCREWDRIVERS

Performance:

Torque: 24 in. lb (2.7 Nm) - 325 in. lb (36.7 Nm)

Speed: 400 rpm - 4400 rpm


Features:

Reversible

Lever Start

Rear Exhaust

Suspension Bail

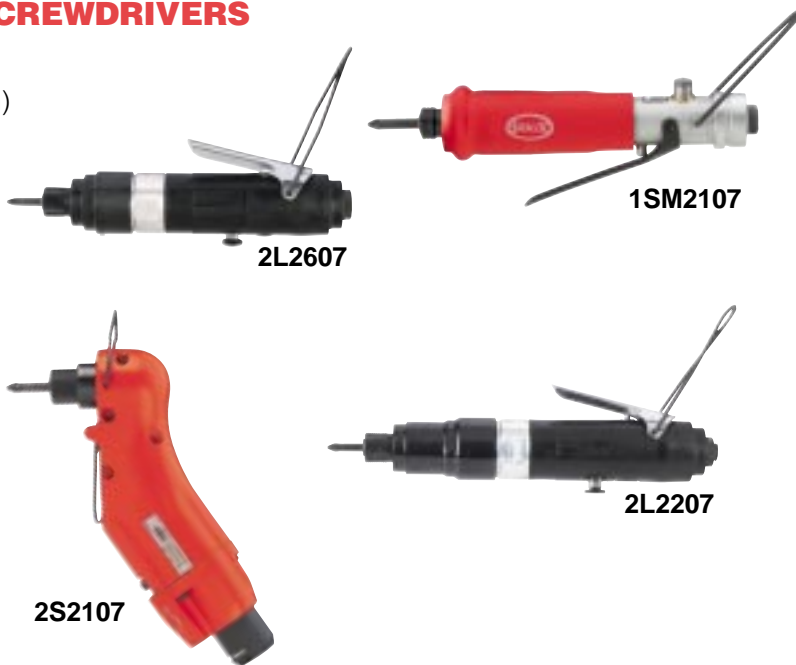

Model Number	Maximum Torque (Soft Joint)		Free Speed rpm	Weight		Length		Side To Center		Sound Level dB(A)
	in. lb	Nm		lb	kg	in.	mm	in.	mm	
Inline - Reversible - 1/4" Quick Change Drive										
1SM2407	24	2.7	2200	1.3	0.6	8.1	206	0.6	15	75
1SM2307	30	3.4	1500	1.4	0.6	9.1	231	0.6	15	75
1SM2207	40	4.5	1100	1.4	0.6	9.1	231	0.6	15	75
1SM2107	55	6.2	800	1.4	0.6	9.1	231	0.6	15	75
2L2407	30	3.4	4400	2.3	1.0	8.8	224	0.9	23	84
2L2307	55	6.2	2500	2.3	1.0	8.8	224	0.9	23	84
2L2607	70	7.9	2000	2.3	1.0	8.8	224	0.9	23	84
2L2207	105	11.9	1200	2.8	1.3	10.0	254	0.9	23	84
2L2107	185	20.9	700	2.8	1.3	10.0	254	0.9	23	84
2L2507	325	36.7	400	2.8	1.3	10.0	254	0.9	23	84
Z-Handle - 1/4" Quick Change Drive										
2S2307	36	4.1	2200	2.3	1.0	2.9	74	0.9	23	75
▶ 2S2207	50	5.7	1600	2.3	1.0	2.9	74	0.9	23	75
▶ 2S2107	70	7.9	1000	2.3	1.0	2.9	74	0.9	23	75

General:

Air Inlet Size: 1/4" NPT

Recommended Hose Size: 1/4" (6 mm) (1SM series);
3/8" (10 mm) (2L, 2S series)

Performance rated @ 90 psig (6.2 bar) air pressure

Tools available with BSPT air inlet upon request

Standard Equipment:

Parts list, Safety and Instruction manual

Comfort Grip (1SM series)

Suspension Bail

Accessories:

Screwdriver Accessories, see page 48

Screwdriver Bits and Finders, see pages 59-60

▶ The quick ship icon indicates our most popular models, selected for their "off-the-shelf" availability from a Sioux Authorized Distributor or distribution warehouse. See page 9 for more information on Quick Ship.

