



IMPACT CUTTERS/FLUX CHIPPERS

BRH-7 series fast hitting and powerful hammers are versatile for various hammering jobs in cutting, ripping, shearing, punching, etc., Needle scaling attachments are available.

UFC series are needed for general scaling applications such as removal of splatter and excess metal after welding, removal of rust, scale paint and soot from metal surface, light fins, flash and sand from castings. Two models are available : UFC-0N for light work and UFC-1N with Valve for heavy duty work.

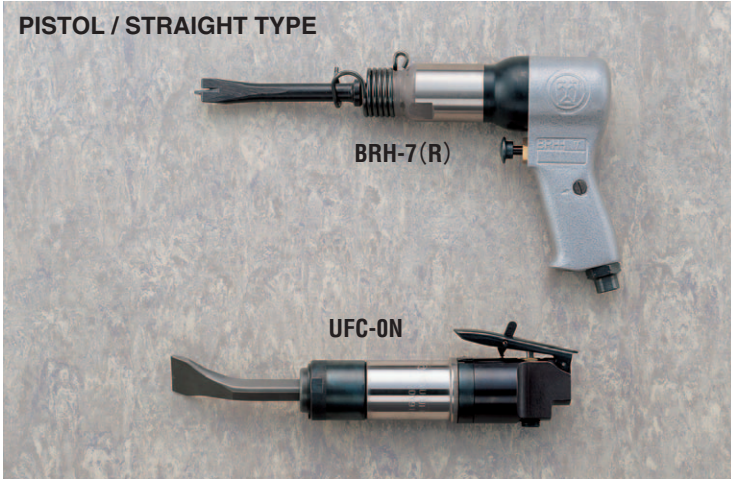

SHANK SIZE

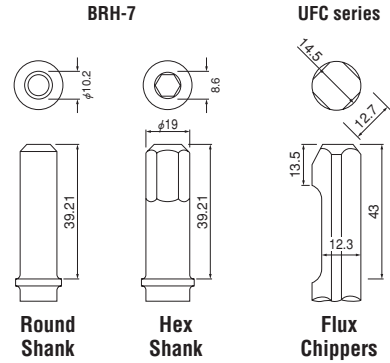


SPECIFICATIONS

Recommended Air Pressure : 0.6MPa(85psi)

Model	Blow Per Min. (about)	Overall Length (about)		Weight Less Chisel (about)		Piston Diameter (about)		Piston Stroke (about)		Air Inlet Thread (Pipe Tap)	Air Hose Size		Average Air Consumption		Noise Level
	bpm	mm	in	kg	lb	mm	in	mm	in	in	mm	in	m ³ /min	ft ³ /min	dB(A)
BRH-7(R,H)	3400	190	7 1/2	1.64	3.60	19.05	3/4	50	1 31/32	NPT1/4	9.5	3/8	0.48	17.0	100
UFC-0N	5300	180	7 1/8	1.38	3.04	25.00	63/64	28	1 1/4	NPT1/4	9.5	3/8	0.3	10.7	90
UFC-1N	4200	190	7 1/2	1.50	3.30	25.00	63/64	34	1 11/32	NPT1/4	9.5	3/8	0.3	10.7	90


CHIPPING & CAULKING HAMMERS

Rugged-designed powerful Hammers with high speed blows are ideal for billet chipping/general chipping and caulking/weld flux, paint, and rust removal/removing gates and fins from castings.

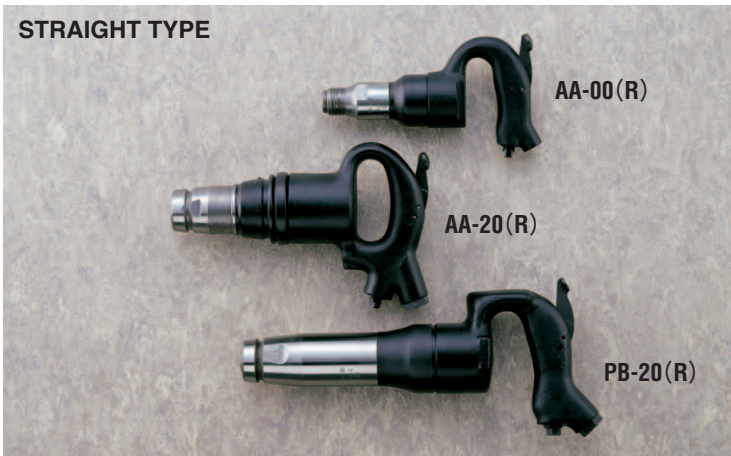

CHISEL RETAINER (Option)

Applicable to both PB and AA series excepting AA-00.

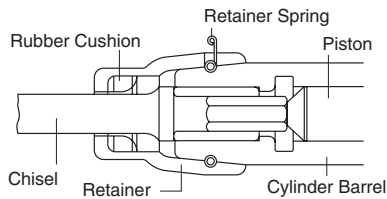

SPRING CHISEL RETAINER

(for AA-00)



(705-813-1)

SPECIFICATIONS

Recommended Air Pressure : 0.6MPa(85psi)

Model	Chisel Shank Size				Blow Per Min. (about)	Overall Length (about)		Weight Less Chisel (about)		Piston Diameter (about)		Piston Stroke (about)	Air Inlet Thread (Pipe Tap)	Air Hose Size		Average Air Consumption		Noise Level			
	Round		Hexagonal			mm	in	kg	lb	mm	in			mm	in	mm	in		m ³ /min	ft ³ /min	dB(A)
	mm	in	mm	in																	
AA-00(R,H)	12.7	1/2	10.5	13/32	2700	228	8 31/32	2.3	5.00	20.0	25/32	50	1 31/32	NPT1/4	9.5	3/8	0.35	12.3	95		
AA-20(R,H)	17.5	11/16	14.7	19/32	2300	270	10 5/8	5.3	11.60	28.0	1 7/64	55	2 5/32	NPT3/8	12.7	1/2	0.60	21.1	100		
AA-30(R,H)	17.5	11/16	14.7	19/32	2000	298	11 23/32	5.7	12.50	28.0	1 7/64	79	3 1/8	NPT3/8	12.7	1/2	0.60	21.1	100		
AA-40(R,H)	17.5	11/16	14.7	19/32	1450	340	13 3/8	6.1	13.40	28.0	1 7/64	111	4 3/8	NPT3/8	12.7	1/2	0.60	21.1	100		
PB-20(R,H)	17.5	11/16	14.7	19/32	1900	350	13 25/32	6.6	14.50	28.5	1 1/8	76	3	NPT3/8	12.7	1/2	0.80	28.0	100		
PB-30(R,H)	17.5	11/16	14.7	19/32	1500	397	15 5/8	7.1	15.60	28.5	1 1/8	102	4 1/62	NPT3/8	12.7	1/2	0.80	28.0	100		