



URD-22 SERIES HEAVY DUTY DRILLS


Smooth and accurate operations for many kinds of applications, such as drilling, tapping, reaming and tube rolling, etc.

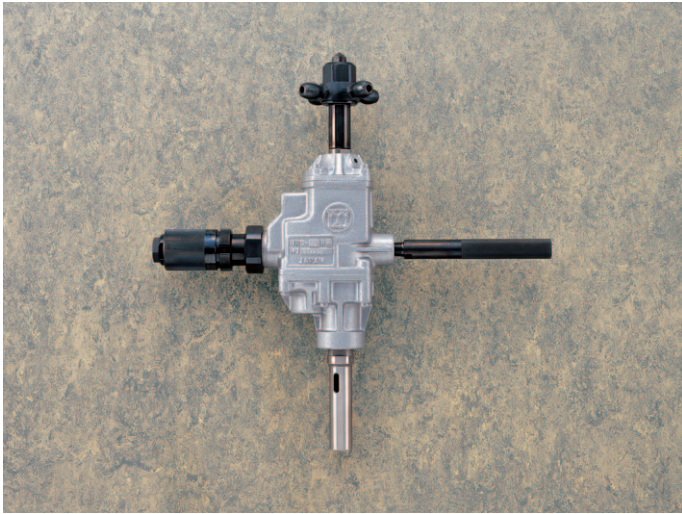

SELF-RETURNING ROLL TYPE THROTTLE HANDLE (STANDARD)

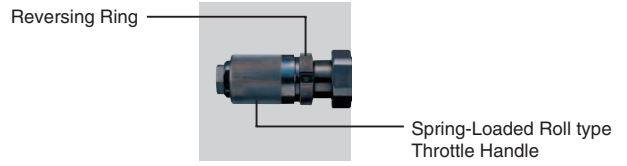

ROLL TYPE THROTTLE HANDLE (OPTION)

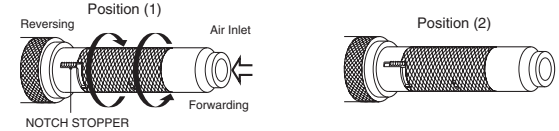

Pull out and set the stopper to position (2) to avoid accidental reversing operation.

Push back and release the stopper to position (1) for reversing operation.

SPECIFICATIONS

Recommended Air Pressure : 0.6MPa(85psi)


Model	Type	Drilling Capacity		Free Speed (about)	Overall Length (about)		Weight (about)		From Center to Outside (about)		Feed Length (about)		Air Hose Size		Average Air Consumption		Noise Level
		mm	in		rpm	mm	in	kg	lb	mm	in	mm	in	mm	in	m ³ /min	
URD-22RR	Self-Returning	22.0	7/8	600	442	17 13/32	5.8	12.8	39	1 17/32	70	2 3/4	12.7	1/2	1.3	46	95

Air Inlet Thread : NPT3/8" for URD-22RR


UT-60 & 66 SERIES TAPPERS

UT-60 series equipped with the "PUSH-PULL" auto-reversing clutch mechanism need no special operation for reversing. Push the tool forward against the work for tapping in, and just pull it backward for reversing out.



UT-66 series reversible drills have the double trigger handle for quick and frequent switchover of rotation.

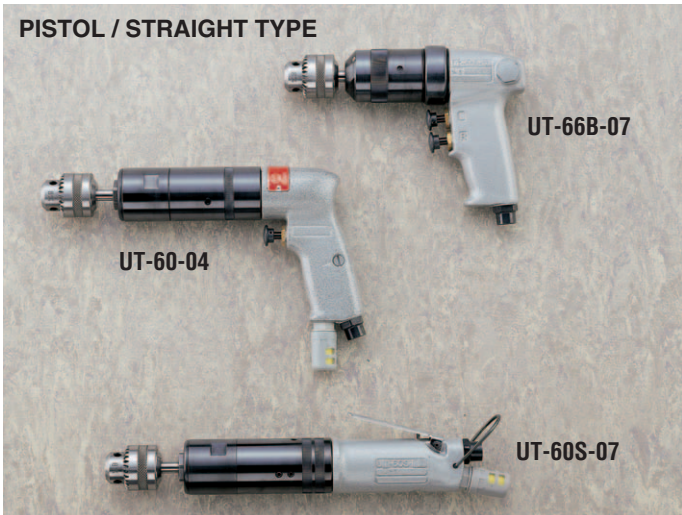

Double-Trigger Handle



"Push-Pull" Auto reversing Clutches



Built-in Air Regulator

SPECIFICATIONS

Recommended Air Pressure : 0.6MPa(85psi)

Model	Tapping Capacity		Free Speed (about)	Overall Length (about)		Weight with Chuck (about)		From Center to Outside (about)		Average Air Consumption		Noise Level
	mm	in		rpm	mm	in	kg	lb	mm	in	m ³ /min	
UT-66B-15	6	1/4	1500	183	7 7/32	1.32	2.90	25.0	31/32	0.4	14.4	85
UT-66B-07	8	5/16	800	196	7 23/32	1.42	3.12	25.0	31/32	0.4	14.4	85
UT-60-07	8	5/16	680	244	9 39/64	1.80	3.96	22.5	57/64	0.5	18.0	75
UT-60-04	8	5/16	400	244	9 39/64	1.80	3.96	22.5	57/64	0.5	18.0	75
UT-60S-07	8	5/16	680	300	11 13/16	1.65	3.63	22.5	57/64	0.5	18.0	75
UT-60S-04	8	5/16	400	316	12 7/16	1.65	3.63	22.5	57/64	0.5	18.0	75

Air Inlet Thread : NPT1/4" for UT-66B-15-UT-60S-04 Air Hose Size : 9.5mm (3/8") for UT-66B-15-UT-60S-04
Nominal Chuck Size : 8mm (5/16") for UT-66B-07-UT-60S-04